

**Contents:**

**Door Stations** *Page 1*  
**Door Latch Control** *Page 2*

**Door Stations**

*Features:*

- Analogue Voice Switched Speaker-Phone.
- Door Latch Output.
- 10 Digit programmable number.
- Non-volatile memory.
- Powered via plug-pack from control room.
- Hotline connection or dialed number.
- Sensitive to Ring Current – IP phone system compatible.
- Auto Answer.
- Flush Mounting model.
- Surface Mounting model.
- Optional Weather Shield.




Flush Mounting



Surface mounting

*Connection Diagram*

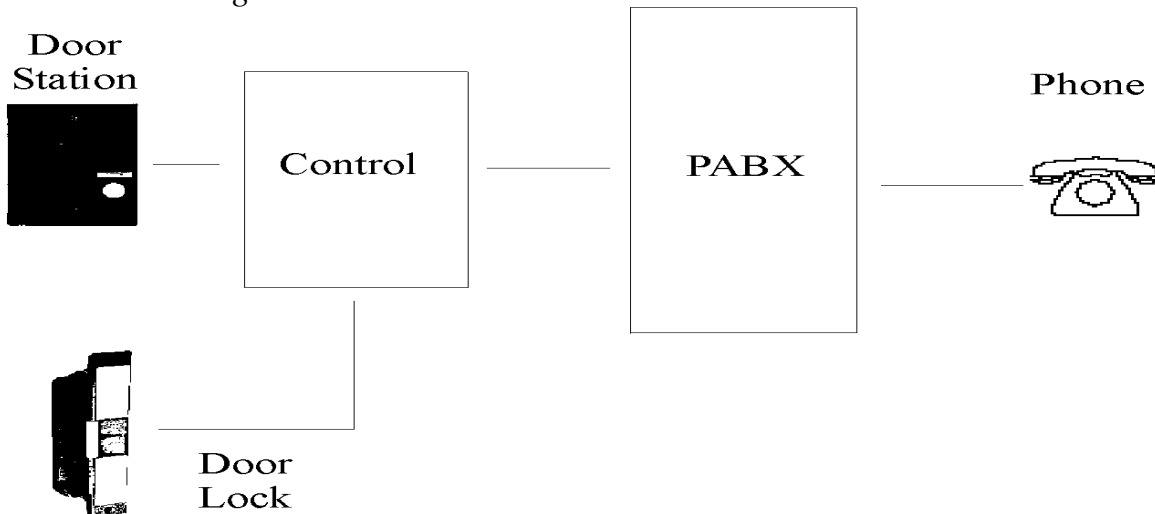

**Item Numbers:**

Flush Mounting	Item No. 3100
Surface Mounting	Item No. 3110
Weather Shield	Item No. 3120

# Door Latch Control

The DTMF Door Control is used to release a locked door remotely using a DTMF phone. The Control sits across the Door Station telephone line and operates for a period of 2 seconds when a pre-determined DTMF code is recognized by the unit. The operated relay in the control provides closed contacts that will take 10 Amps current in order to operate a release solenoid.

Item No. 1070

