


## Timed Loop Break Unit

The Timed Loop Break Unit can be located on any network where remote control of a “hook-flash” signal is required.

The unit monitors the line looking for the unique signal code.

When this code is received the unit disconnects the line for 100 milliseconds. This is recognized as a hook-flash signal to the line circuit of the PABX. Dial tone is then presented to the distant end and the call can be diverted elsewhere within the network.

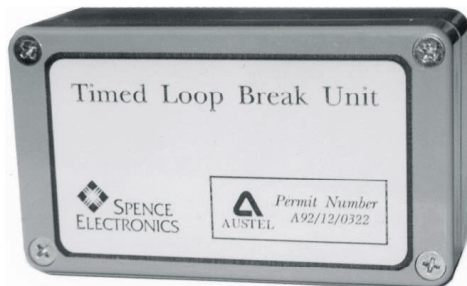

### Features:

- Gives 100 ms break to line**
- Transparent to all other signals**
- Activated by DTMF signal**
- PABX battery or plugpack powered**

